



## H3CT

### 特性

用于时序控制的时间继电器,备有板前,板后的连接插座,LED在线指示灯,显示工作状态


### 性能参数

电源电压	AC/DC12V~48V,AC12V~380V 50HZ/60HZ
功耗	DC1.0W,AC1.0VA
控制输出	5A220VAC
绝缘电阻	DC500V,100MΩ
介质耐压	BCC1500VAC,BOC1000VAC
环境温度	-10°C~50°C
湿度	35%~85%
寿命	机械寿命: 10 <sup>6</sup> , 电气寿命: 10 <sup>5</sup>
重量	≈160g

### 订货标记示例

#### 时间继电器H3CT

H3CT - 8 - A AC380V

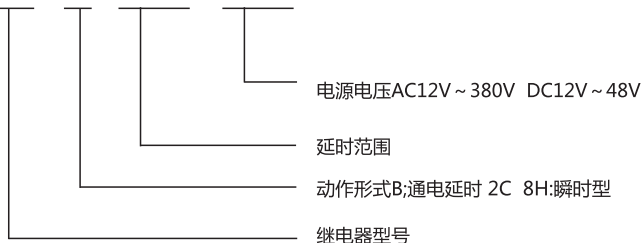


### 时间范围


H3CT-8/8H-A	0.5S,5S,0.5M,5M
H3CT-8/8H-B	1S,10S,1M,10M
H3CT-8/8H-C	3S,30S,3M,30M 6S,60S,6M,60M
H3CT-8/8H-D	1M,10M,1H,10H
H3CT-8/8H-E	3M,30M,3H,30H

### 外形图、接线图、安装尺寸

#### H3CT外形图

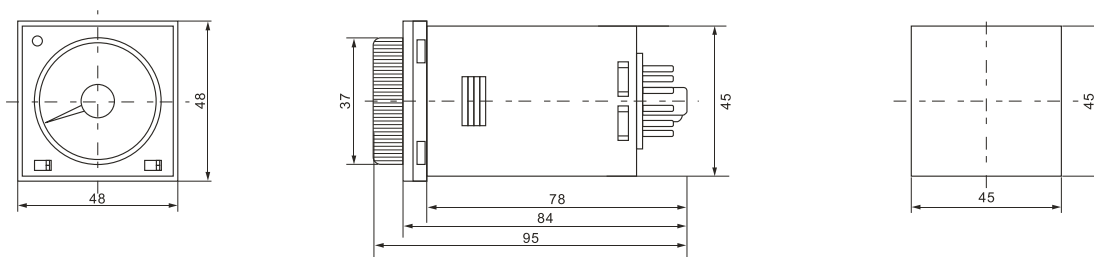

#### H3CT接线图

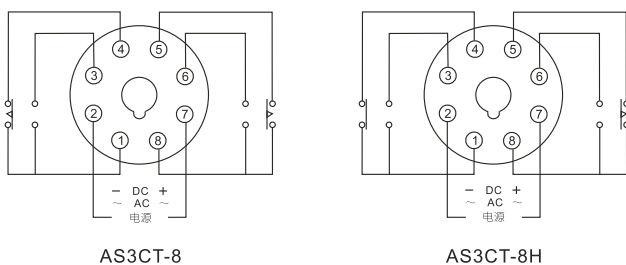

#### H3CT时序图

