



接触参数

触点形式	2Z、2H、2D、3Z、3H、3D、4Z、4H、4D
接点电阻	≤ 100mΩ(1A 6VDC)
接触金属	AgCdO AgSnO ₂
接触负载	10A 250VAC/30VDC

性能参数

绝缘电阻	≥ 500MΩ (500VDC)
绝缘电压	BCC 1500VAC 1min
	BOC 1000VAC 1min
	接触组 ≥ 1500VAC 1min
启动/释放时间	≤ 25ms/25ms
插座模式	电路板 and 插座安装

线圈参数

线圈额定功率	DC/AC 0.9W/1.2VA
--------	------------------



HH62P HH63P HH64P


DC 线圈规格参数表

额定电压	吸合电压	释放电压	线圈电阻
VDC	VDC	VDC	Ω±10%
5	4.0	0.5	28
6	4.8	0.6	40
12	9.6	1.2	160
24	19.2	2.4	640
48	38.4	4.8	2560
110	88.0	11.0	12100

AC 线圈规格参数表

额定电压	吸合电压	释放电压	线圈电阻
VDC	VDC	VDC	Ω±10%
6	4.8	1.8	12
12	9.6	3.6	42
24	19.2	7.2	168
48	38.4	14.4	675
110	96.0	36.0	3500
220/240	176.0	66.0	14000/16500





底座

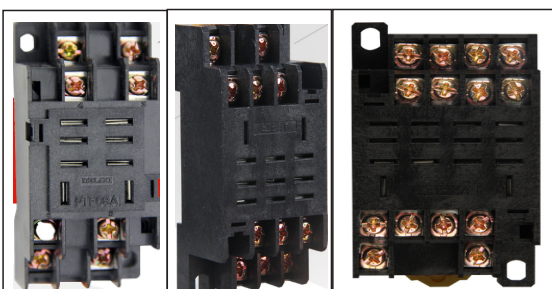





PTF08A PTF11A PTF14A

轮廓尺寸;接线图(下图)

HH62P

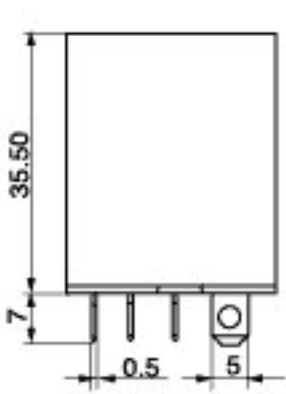

HH63P

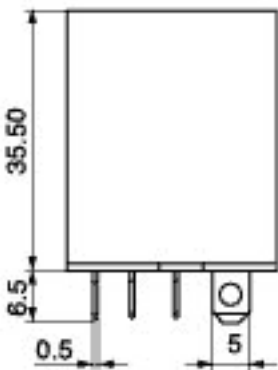

HH64P

